




Specialty Filter Cores Coalescing Filter Cores Pool & Spa Filter Cores

Quality, Performance and Service by Design

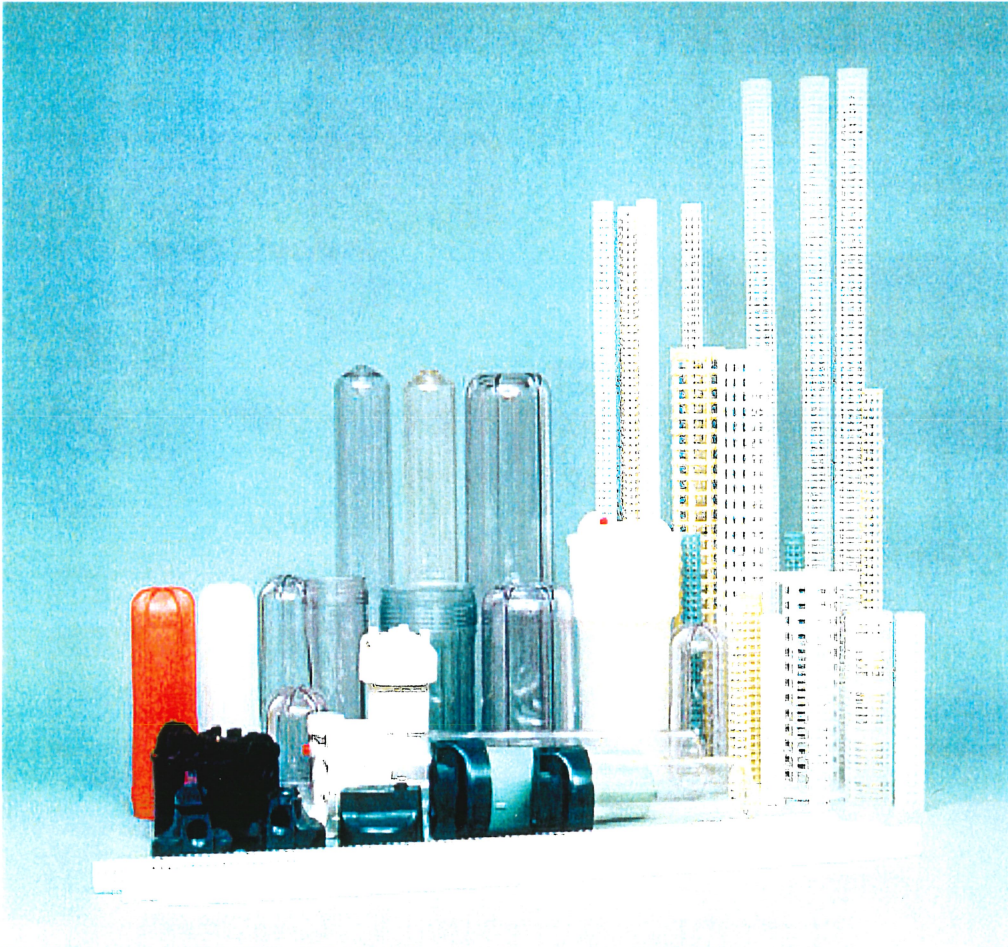

For over 50 years, **Sonoco Crellin** has set the quality standard in filter cores, cages, housings, and other custom filtration components.

Today, the company provides a wide range of filter cores to many segments of the filtration market.

A COMPLETE LINE OF FILTER CORES

Sonoco Crellin Filter Cores Feature:

- Longitudinal and Radial Ribs
- A Selection of Thermoplastic Resins
- Ability to Hold Tight Tolerances
- Custom Cut Sizes

To Give Your Filters These Benefits:


- High Collapse Strength
- High Flow-Through
- Thermal Stability
- Chemical Resistance
- Flexibility to:
 - Maximize Performance
 - Minimize Cost

Sonoco Crellin
87 Center Street
Chatham, NY 12037
Tel: 518-392-1700
Fax: 518-392-6213
E-mail: filtration@sonoco.com
www.sonococrellin.com

Crellin B.V.
Veilingweg 24
2651 BE Berkel en Rodenrijs
The Netherlands
Tel: 31-104-55-43 44
Fax: 31-104-55-12 98



Coalescing Filter Core

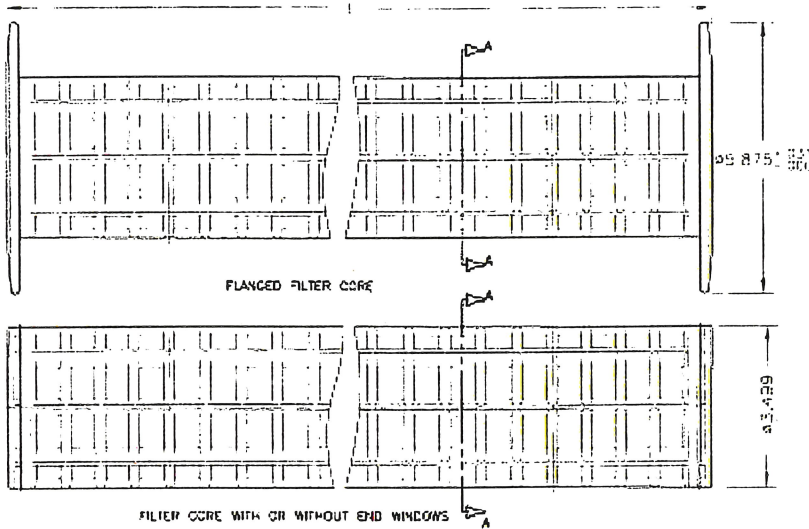

Dimensions in ABS


- 3.125" ID
- 0.187" Wall Thickness
- 40.3% Flow Through

- Large Diameter
- Greater Flow Through
- High Collapse Strength/Temperature Resistance
- Smooth Finish
- Custom Cut Sizes Available
- Materials Available:
 - ABS
 - Polypropylene
 - 33% Glass Filled Nylon
 - Glass Filled ABS

Nominal		Length	Tolerance
11"		11.000"	+/- 0.040"
22"		22.000"	+/- 0.080"
22"	Slotted End	22.000"	+/- 0.080"
22"	6" Flanges	22.000"	+/- 0.080"

Pool & Spa Core

- 2.176" ID
- 0.125" Wall Thickness
- 56.5% Flow Through
- Designed for Pleated Pool and Spa Filter Cartridges
- Stackable
- Smooth Finish
- Available Materials:
 - Polypropylene
 - Talc-Filled Polypropylene

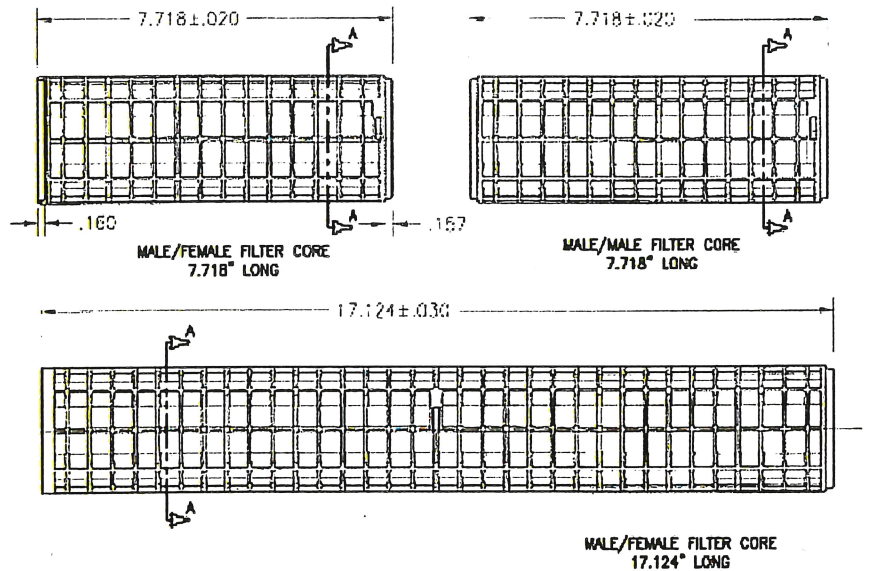

Dimensions in Polypropylene

Nominal		Length	Tolerance
7.718"	M/M and M/F ends	7.718"	+/- 0.015"
17.124"	M/F Ends	17.124"	+/- 0.030"